




The first thing we need to do is connect the parts on the pattern itself.
We connect the parts close to each other.

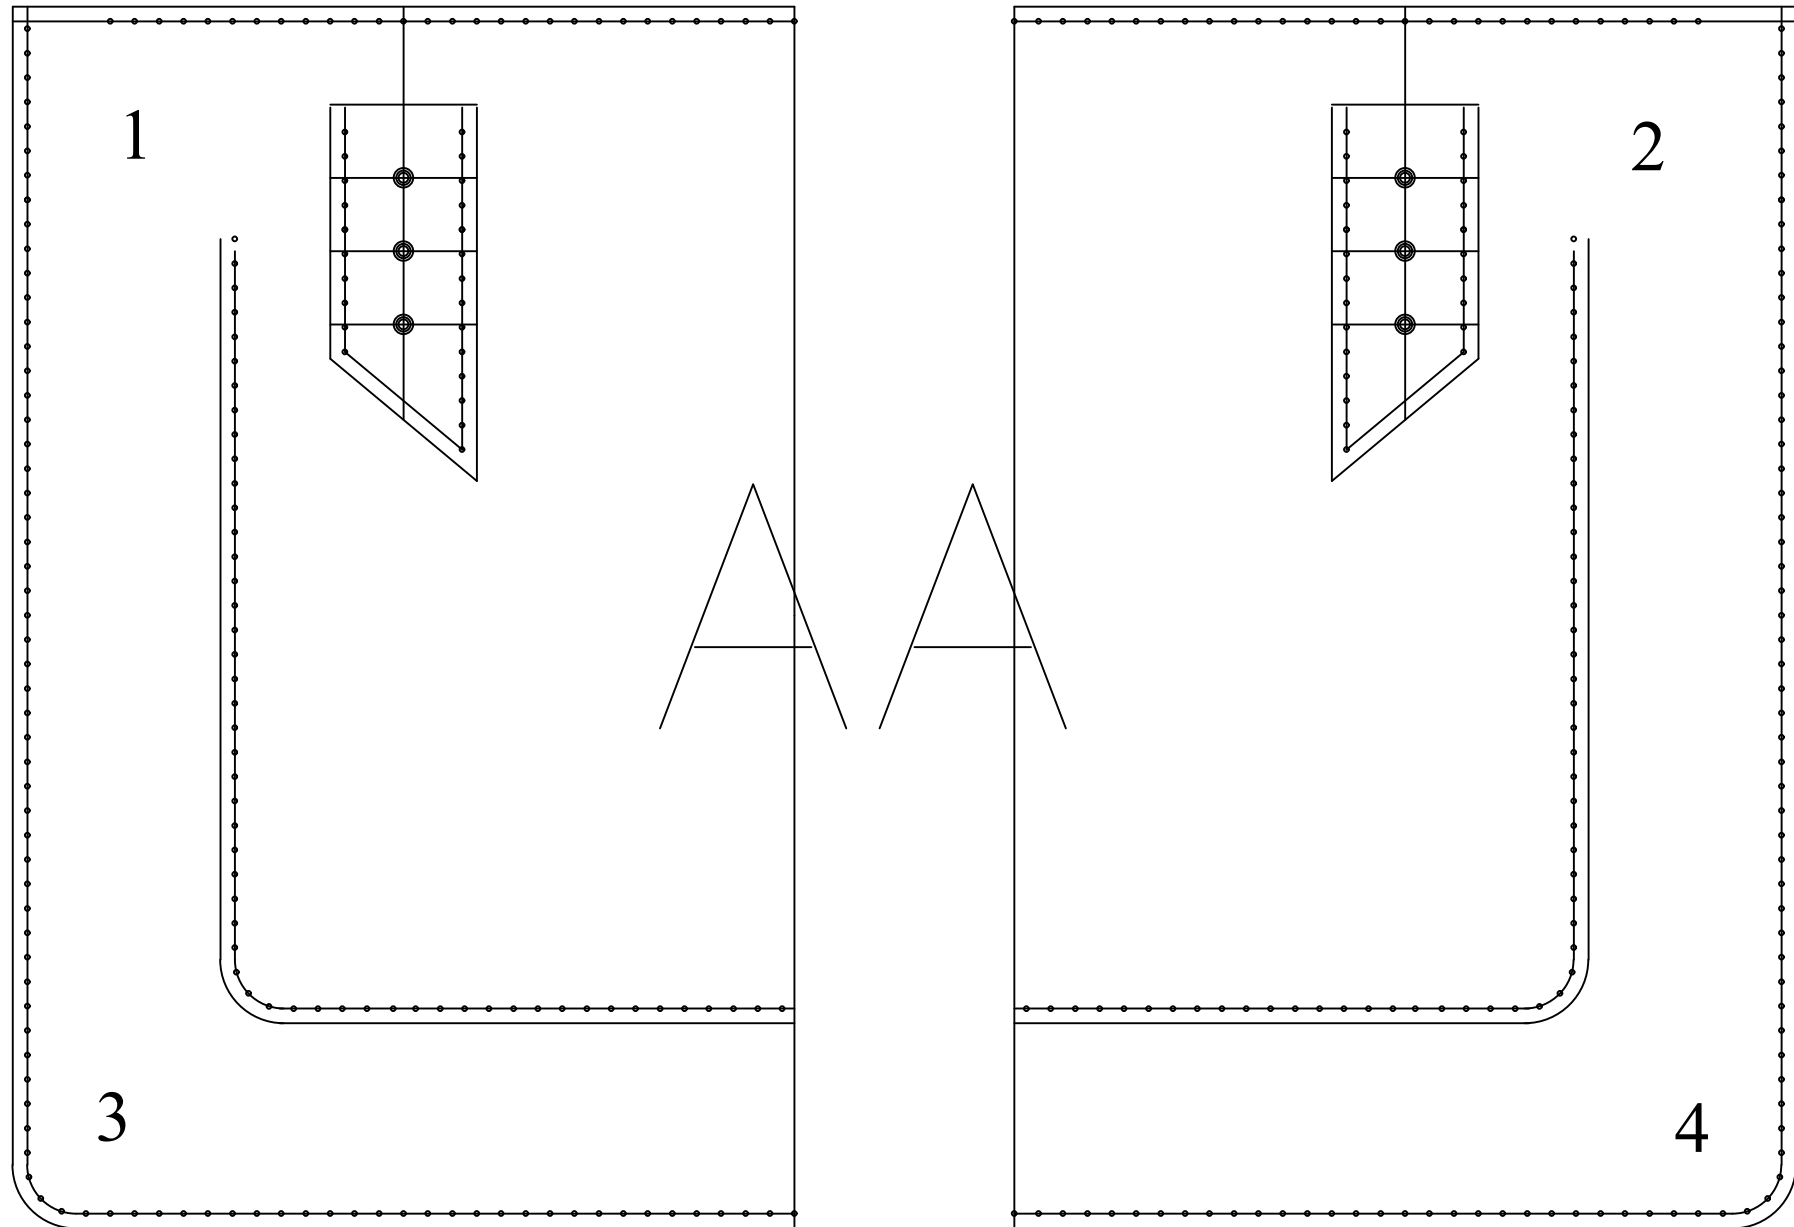


The second part is the same as the first, we just don't punch holes on it for the inner pocket. Or, at your discretion, we can make two internal pockets.

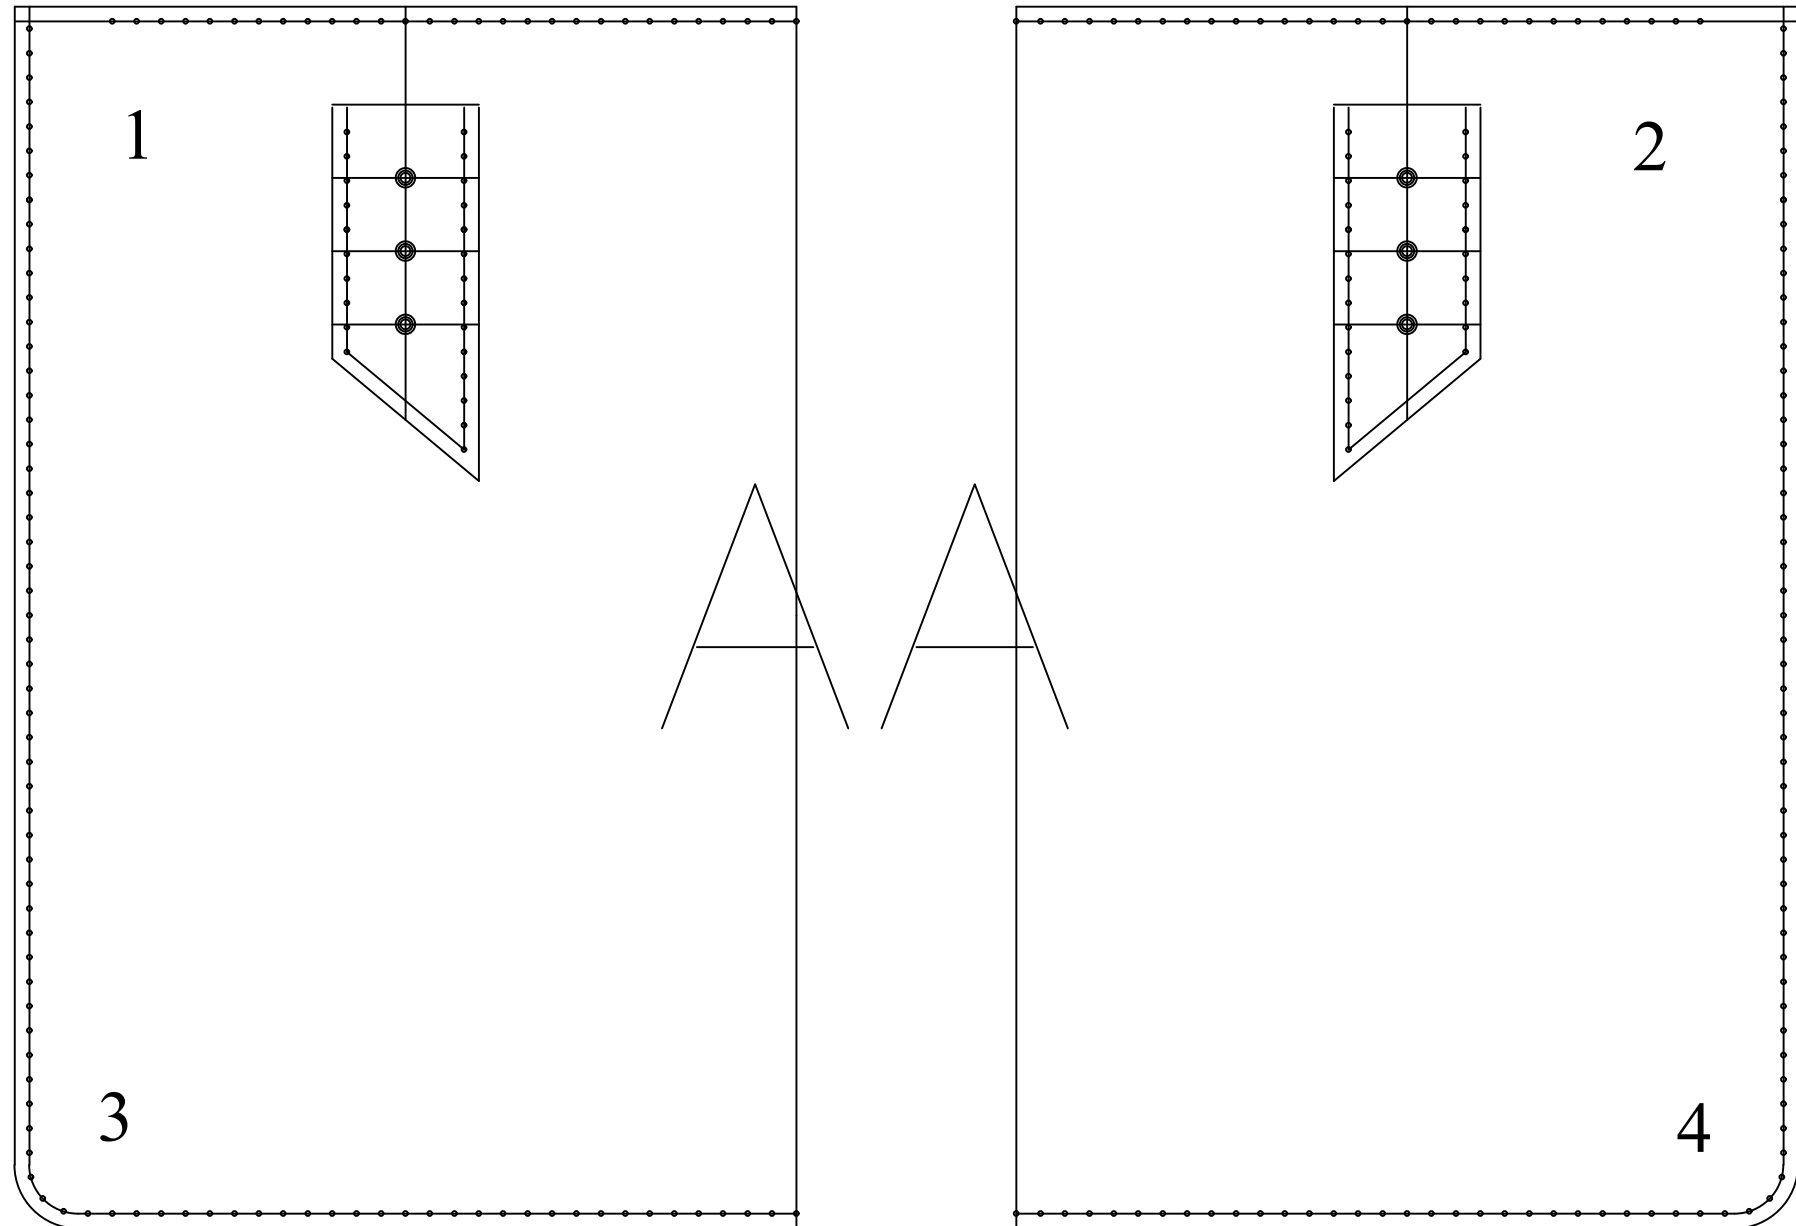


We combine these four things into one whole. This is the bottom of our bag.

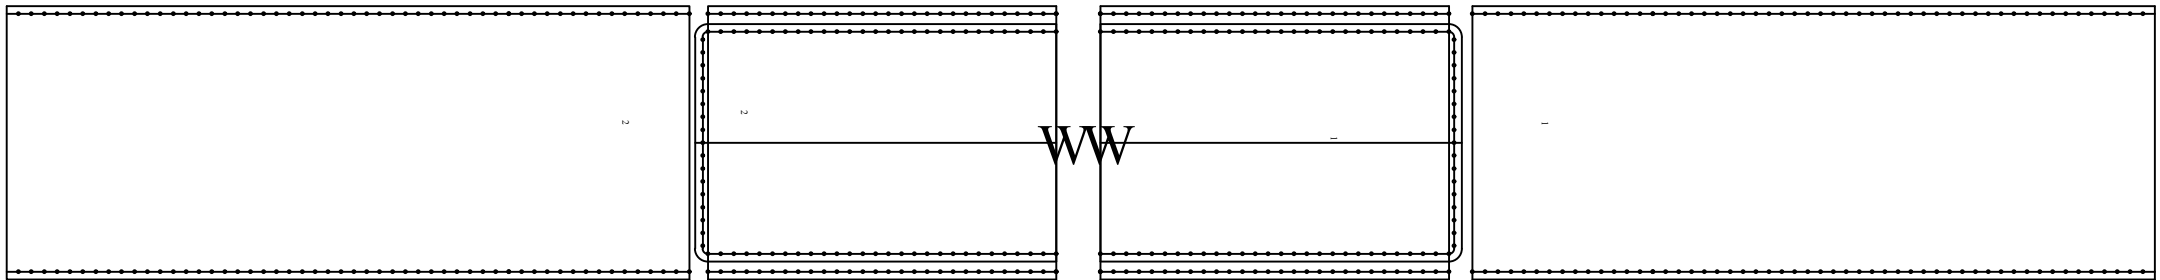


We also connect the bottom part by ourselves, this reinforces the bottom of the bag, we sew this part inside the bag.

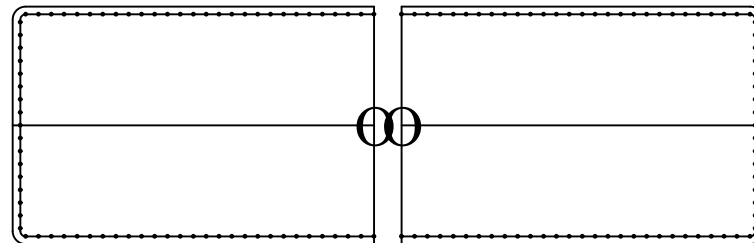


Two parts to which we will sew a zipper. We sew the zipper to the narrower side of the parts.

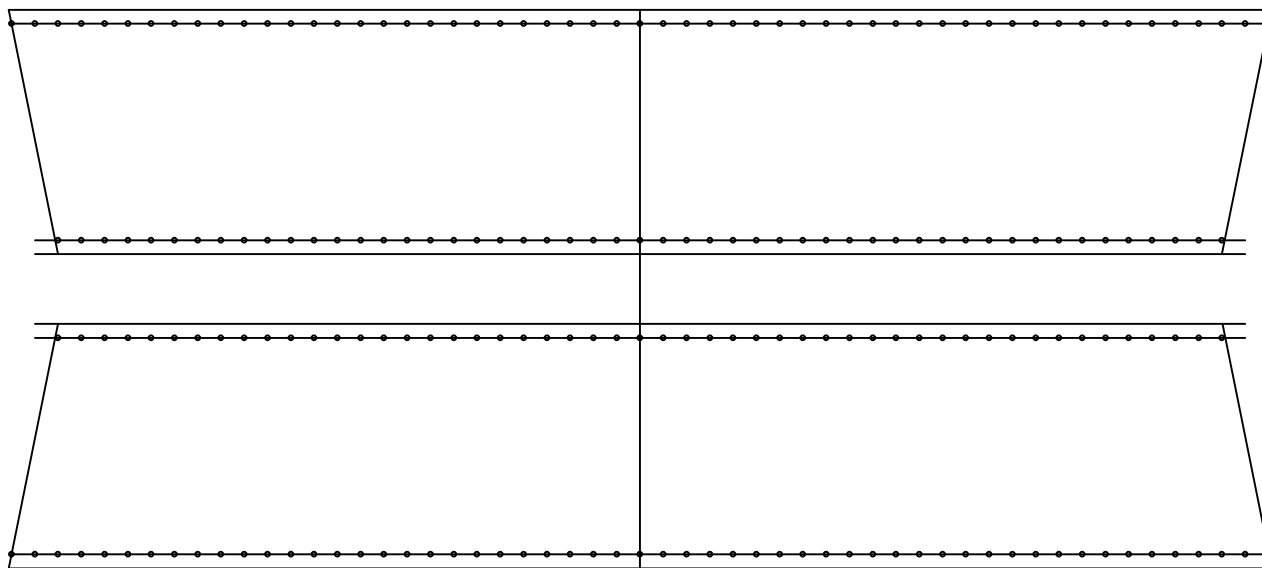


From these parts we assemble one-piece handles for bags. We connect closely. If you want to make handles from two layers of leather like mine, print the data twice, or use the template for the second handle again.

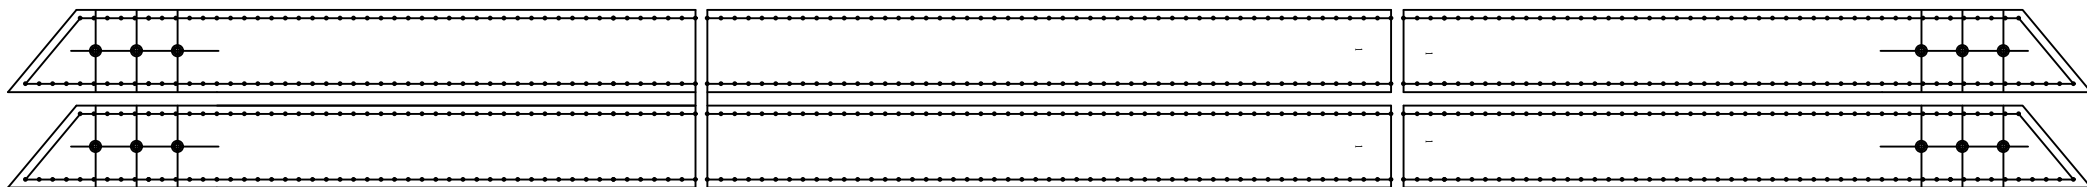

After we have cut out and punched all the holes, we begin sewing the handbag.
First of all, we sew the handles to the main part with the inner pocket, since after sewing the inner pocket it will not be possible to install the holnitsens.
After sewing on the handle and installing the trim, we sew on the inner pocket.

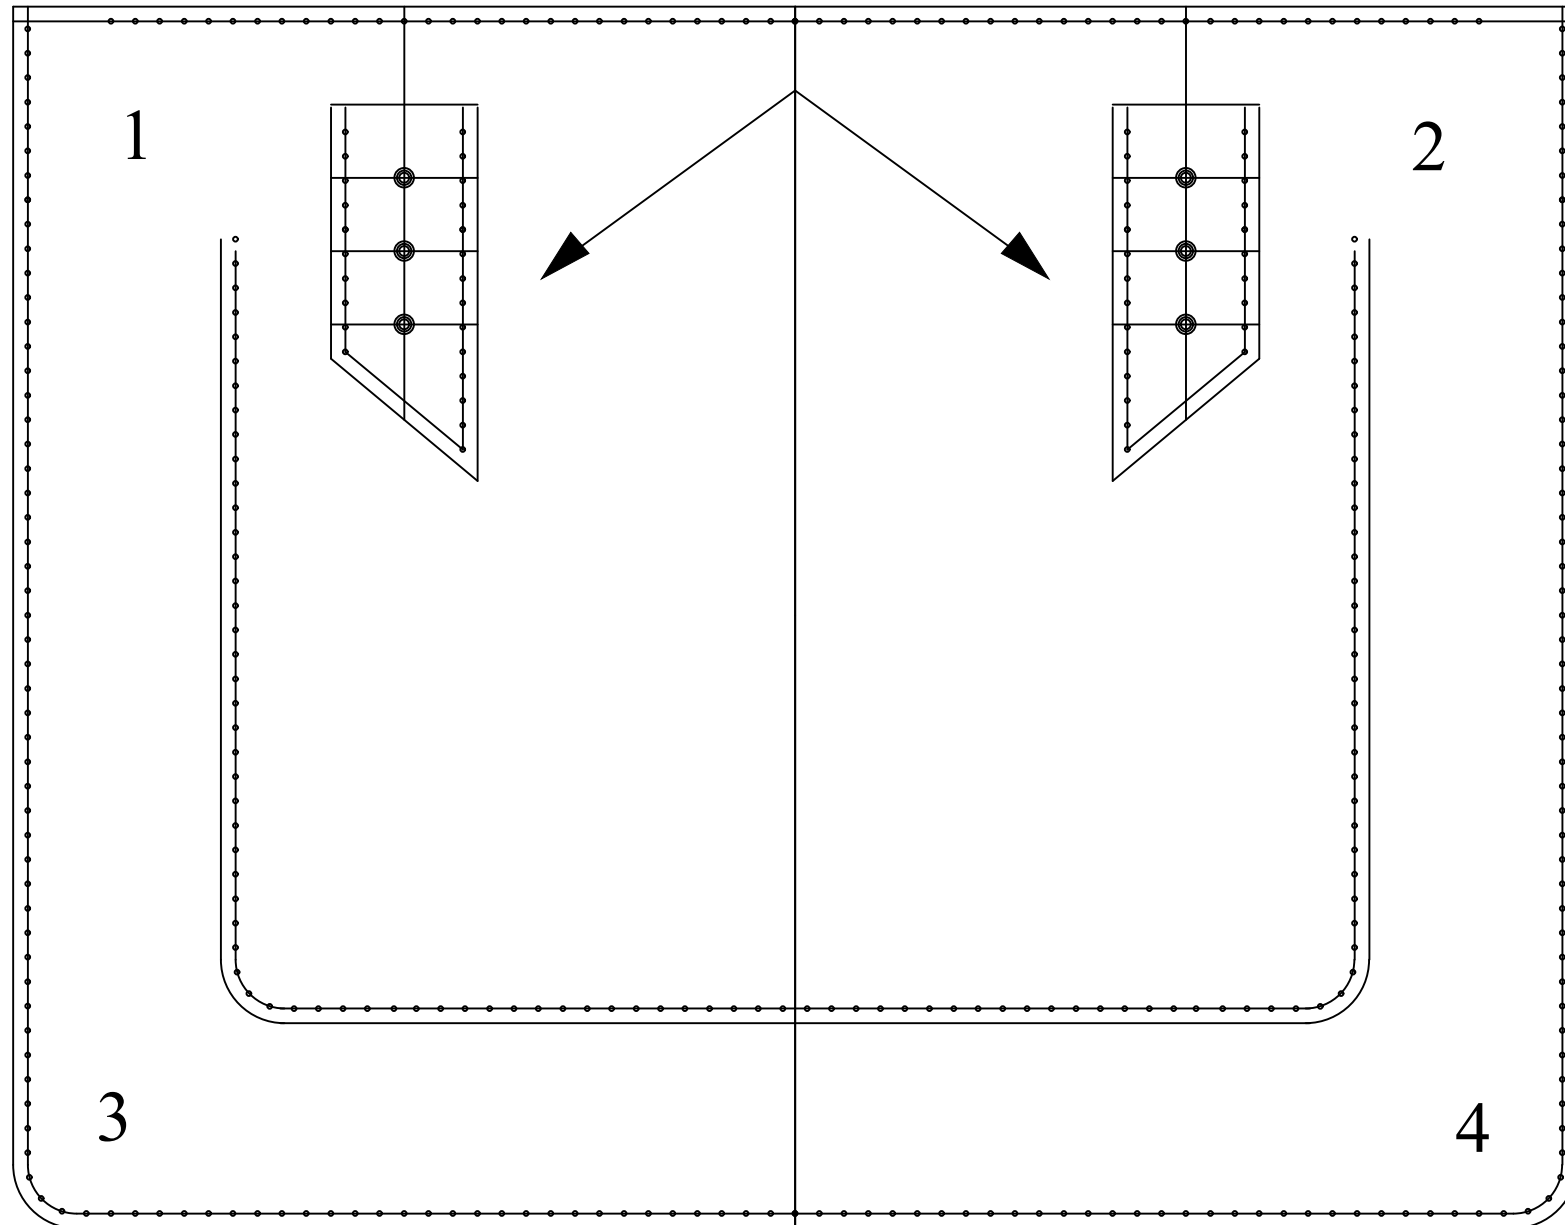

Our next step is to attach a reinforcing element to the bottom of the bag. So that the bottom would be more dense.

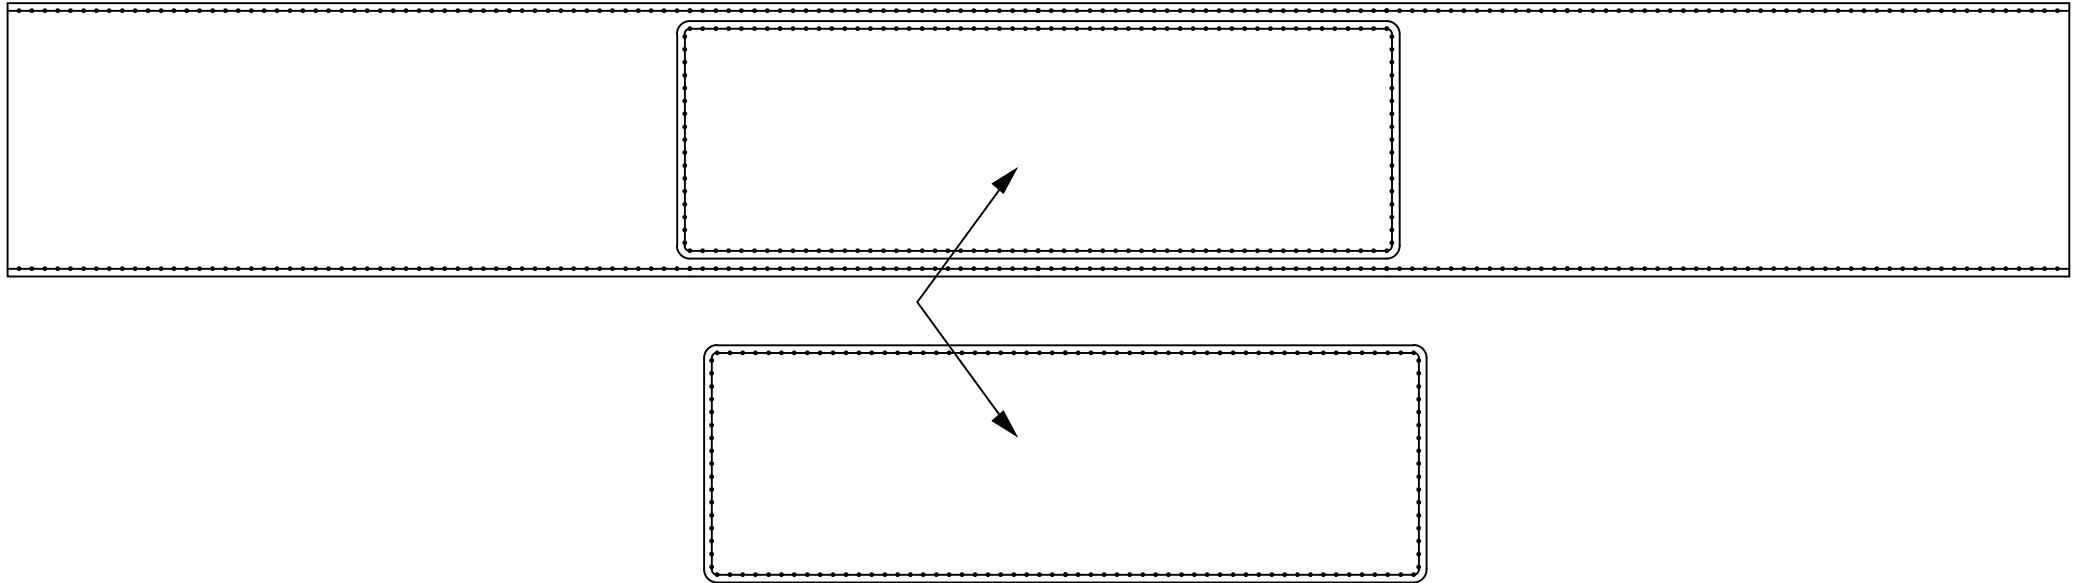

After sewing the bottom, sew the second handle to the main part.

Our next step is assembling the bag.

We sew the bag face to face so that later we can turn the bag inside out and get it with an internal seam.

We sew a snake to the details listed below.

After we have turned the bag inside out and we have sewn the snake, all we have to do is sew the snake to the bag itself and the sewing of this bag will be completed.

